


# M150

## World's Smallest Stringpot

Ultra Miniature String Pot • Voltage Divider Output  
 1½-inch Stroke Range  
 Precision High-Cycle Potentiometer  
 Designed for Test and Space-Critical Applications

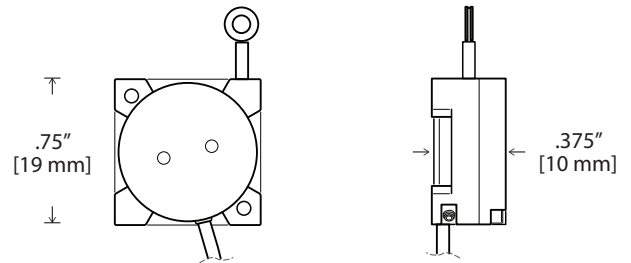

Introducing the world's smallest stringpot. The M150 is smaller than a thumbprint and occupies a tiny space of only .74 x .74 x .38 inches. With a full stroke measurement range of 1.5 inches, the M150 has been designed for many aerospace and automotive space-critical test applications such as throttle position and crash-test instrumentation.

The heart of the M150 is a precision high-cycle conductive plastic potentiometer that delivers a high-linearity voltage position feedback signal. With its rugged all aluminum construction, the M150 has been engineered for reliability and to provide quick, easy and hassle-free installation.

### GENERAL

Full Stroke Range	0-1.5 inches
Output Signal Options	voltage divider (potentiometer)
Accuracy	± 1% full stroke
Resolution	essentially infinite
Sensitivity	897 – 924 mV/V full stroke
Measuring Cable	.014-inch dia. nylon-coated stainless steel
Measuring Cable Tension	4 oz. ±25%
Maximum Measuring Cable Acceleration	39 g
Enclosure Material	anodized aluminum
Sensor	conductive plastic precision potentiometer
Potentiometer Cycle Life	5 million cycles
Weight	0.5 oz. max.


### ELECTRICAL

Input Resistance	5K ±10% ohms
Recommended Output Signal Current	< 1µA
Recommended Maximum Input Voltage	20 VDC


### ENVIRONMENTAL

Enclosure	NEMA 12, IP 50
Operating Temperature	-40° to 185°F (-40° to 85°C)
Temp. Coefficient of Sensing Element	.0028%/°F (.005%/°C)
Vibration	up to 10 g at 30 – 2000 Hz max.


### Output Signal

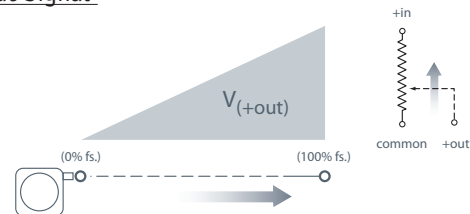

### Electrical Connection



Outline Drawing:

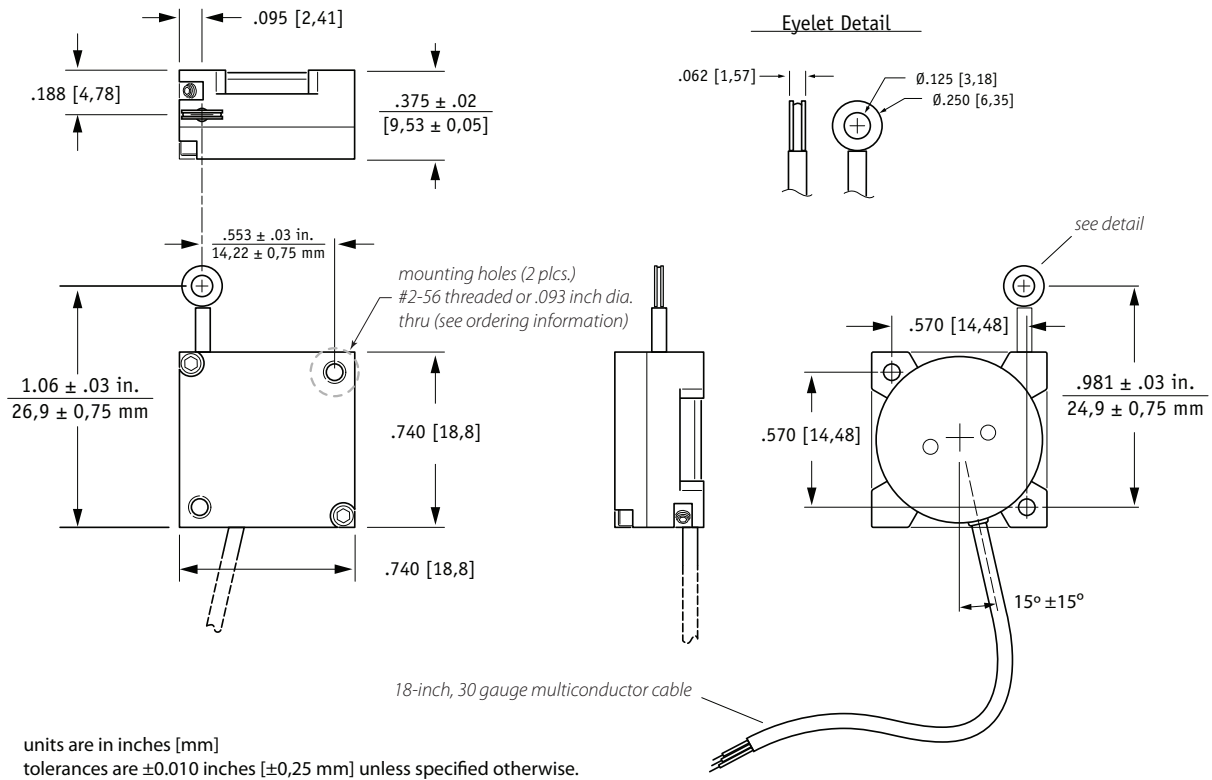

Ordering Information

**Model Number:**

**M150 - 4 - A - B - 5K - C1**  
order code:

Sample Model Number:

**M150 - 4 - H1 - E - 5K - C1**

- A** mounting hole style: .093 inch dia. thru
- B** measuring cable termination: eyelet

**Mounting Hole Style:**




**A** order code:

**H1**

.093 thru

**H2\***


threaded



\*-includes: 4) #2-56 x 3/8" pan head mounting screws with washers

### Measuring Cable Termination:

③ *order code:*

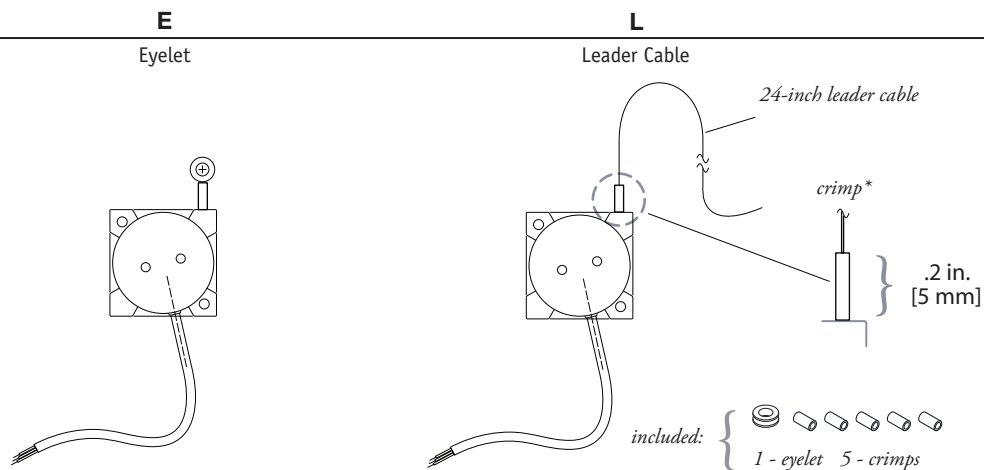

\*note: crimped stop prevents leader cable from retracting into sensor body

### 联系方式



深圳市亿为测控电子有限公司  
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com